



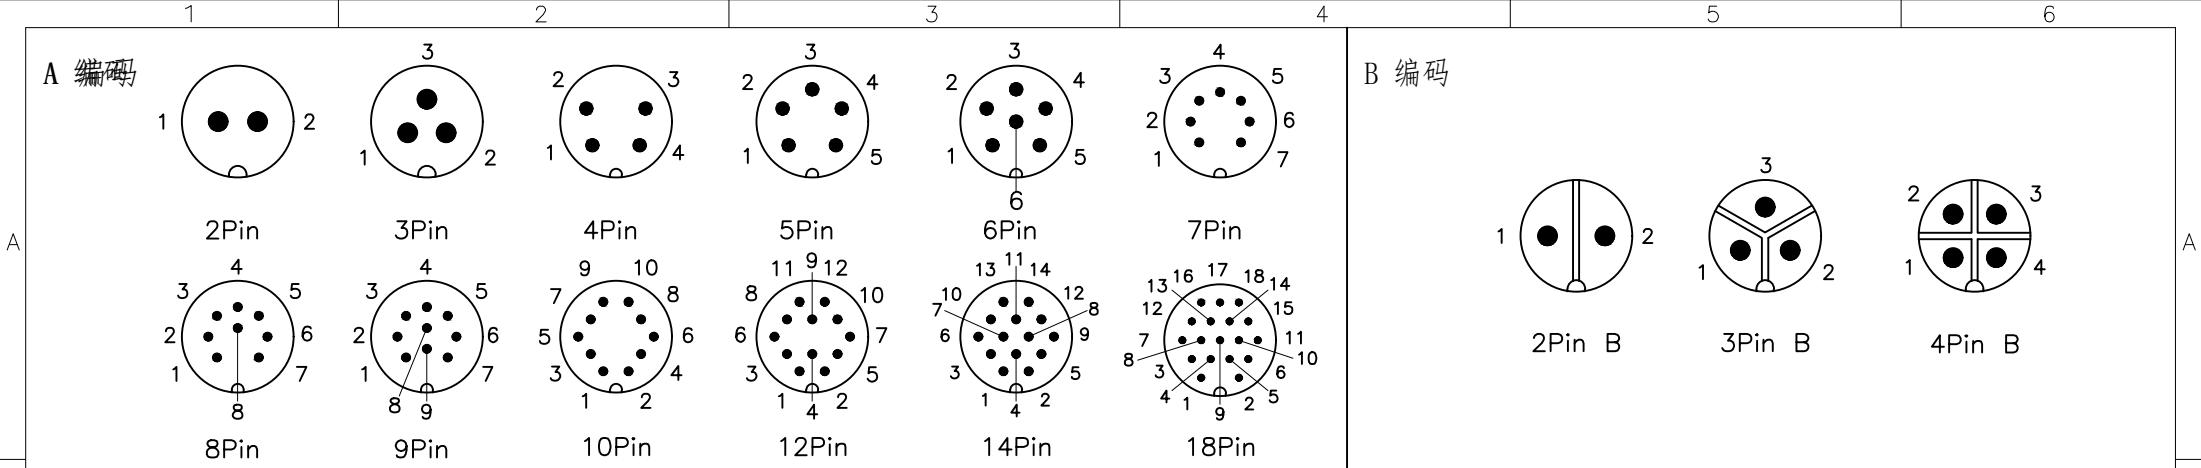

芯数	2P	3P	4P	5P	6P	7P	8P	9P	10P	12P	14P	18P	2P B	3P B	4P B	
额定电压	125V	125V	125V	125V	125V	60V	60V	60V	60V	60V	60V	30V	300V	300V	300V	
额定电流	20A	20A	10A	10A	10A	5A	5A	5A	5A	5A	5A	2A	20A	20A	20A	
防水等级	IP67/IP68															
使用温度	-45°C~105°C															

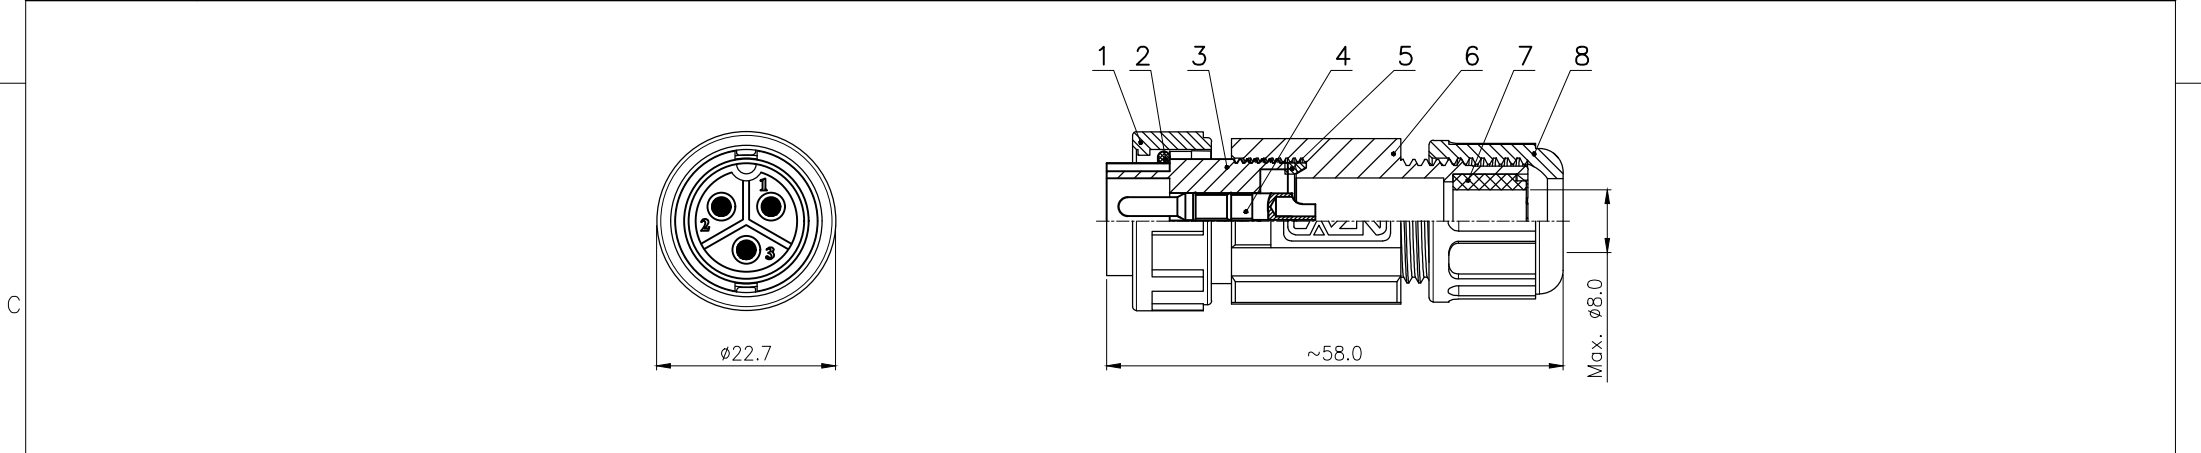

8	E13 紧锁螺帽	1
7	E13 组装式防水硅胶塞 70° 硅橡胶	1
6	E13 插头主体	1
5	E13 组装式主体防水垫片 70° 硅橡胶(橙色) ϕ 14.8× ϕ 12-2.7	1
4	E系列 焊线式公针长针	2~18
3	E13 针型插头外壳	1
2	E13 插头胶芯0型防水圈 70° 硅橡胶(红色) ϕ 14× ϕ 11×1.5	1
1	E13 卡扣式连接螺帽	1
序号 (No.)	名称 (Name)	数量 (Qty)

GENERAL TOLERANCE (UNLESS SPECIFIED) ≤ 10 ± 0.1 $< 10 \sim \leq 20$ ± 0.2 $< 20 \sim \leq 50$ ± 0.5 Angle $\pm 1^{\circ}$	DWN	STA®思大	
	CHK		
	APVD	TITLE E13 卡扣式针型组装式插头	
THIRD ANGLE	UNIT MM	REV A	PART NO
	SIZE A4	SHEET 1 OF 1	DRAWING NO E13P-BA1-Px